

ETKDI-N /ETWDI-N

Single-jet dry-dial meter for cold and hot water

The ETKDI-N / ETWDI-N is a single-jet meter with a 7- or 8-digit register with protected magnetic coupling. A mechanical pulser is already factory-assembled. The individual advantage of the meter is an exceptionally compact design. With its very small height, the meter easily adapts to any installation situation. The ETKDI-N / ETWDI-N guarantees reliable recording of meter data for individual consumption billing. Alternatively, the reed switch interface enables remote reading of the meter data via PDC via radio with LoRaWAN® or wM-Bus.

All materials, which are used in the drinking water section, comply with the required standards, guidelines and the current German drinking water approval (other country-specific drinking water approvals on request).



Performance characteristics at a glance

- Single jet dry-dial meter with protected magnetic coupling
- For horizontal and vertical installation (also for ascending and descending pipes)
- With 8-rollers-register and magnet pointer with 1 l/pulse, optional with 7-rollers-register and magnet pointer with 10 l/pulse
- Register cap made of high-quality UV-resistant polymer plastic
- Protection cap can be retrofitted as an option
- Brass meter housing according to UBA (Federal Environment Office) list
- Register rotatable 355 °
- Operating pressure MAP 16
- Approved according to MID

Applications

- For the consumption measurement of cold and unpolluted drinking water or service water up to 50 °C (ETKD)
- For the consumption measurement of hot and unpolluted drinking water or service water up to 90 °C (ETWD)

AMR options

- Retrofittable with PDC module (PulseDataCapture):
 - PDC LPWAN radio module for LoRaWAN®
 - PDC wireless M-Bus radio module 868 MHz
- With a factory-assembled mechanical pulser:
 - 10 l/pulse at 7-digit-register
 - 1 l/pulse at 8-digit-register

Technical data


Permanent Flowrate	Q_3	m ³ /h	1,6	2,5	2,5	2,5	4
Attainable measuring range	Q_3/Q_1	R	80H/40V	80H/40V	80H/40V	80H/40V	80H/40V
Standard measuring range ¹	Q_3/Q_1	R	80H/40V	80H/40V	80H/40V	80H/40V	80H/40V
Overload Flowrate ²	Q_4	m ³ /h	2,00	3,125	3,125	3,125	5
Transitional Flowrate ²	Q_2	l/h	32H/64V	50H/100V	50H/100V	50H/100V	80H/160V
Min. Flowrate ²	Q_1	l/h	20H/40V	31H/63V	31H/63V	31H/63V	50H/100V
Start-up flow rate	-	l/h	<10	<10	<10	<10	<14
Display range	min	l	0,02	0,02	0,02	0,02	0,02
	max	m ³	R8 99.999,999 R7 99.999,99	R8 99.999,999 R7 99.999,99	R8 99.999,999 R7 99.999,99	R8 99.999,999 R7 99.999,99	R8 99.999,999 R7 99.999,99
Temperature range	Cold water	°C	0.1-50	0.1-50	0.1-50	0.1-50	0.1-50
	Hot water	°C	0.1-90	0.1-90	0.1-90	0.1-90	0.1-90
Operating pressure	MAP	bar	16	16	16	16	16
Pulse value	-	l/pulse	1/10	1/10	1/10	1/10	1/10
Pressure loss class at Q_3	Δp	bar	0,63	0,63	0,63	0,63	0,63
Mechanical environmental condition	-	-	M1	M1	M1	M1	M1
Climatic ambient conditions ³	-	°C	5 - 70	5 - 70	5 - 70	5 - 70	5 - 70
Flow profile sensitivity	-	-	U0/D0	U0/D0	U0/D0	U0/D0	U0/D0

Dimensions and weights:


Nominal diameter	DN	mm	15	15	15	20	20
		inch	1/2" (7/8") ⁴	1/2"	1/2" (7/8") ⁴	3/4"	3/4"
Overall length	L2	mm	110/115/130	80	110/115/130	110/130	130
Overall length with connectors approx.	L1	mm	190/195/200	160	190/195/200	190/226	226
Thread meter G x B	D1	inch	3/4"	3/4"	3/4"	1"	1"
Thread connector	D2	inch	1/2"	1/2"	1/2"	3/4"	3/4"
Width approx.	B	mm	66	66	66	66	66
Height approx.	H1	mm	87	87	87	90	90
Weight approx.	-	kg	0,48/0,49/0,51	0,47	0,48/0,49/0,51	0,59/0,62	0,62

¹ Other measuring ranges (R) on request² The data refers to the standard measuring range³ Condensation possible⁴ Thread 7/8"= on request


Attention: not all versions are available in all markets

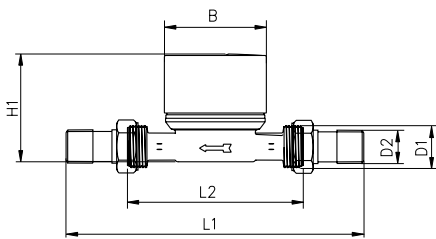

Dimensions

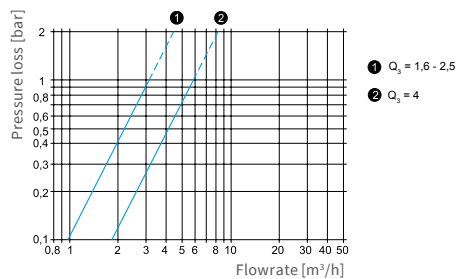

Pressure loss curve

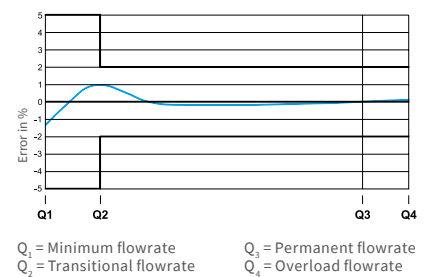

Q_1 = Minimum flowrate
 Q_2 = Transitional flowrate
 Q_3 = Permanent flowrate
 Q_4 = Overload flowrate

Typical error curve

ZENNER International GmbH & Co. KG

Heinrich-Barth-Straße 29 | 66115 Saarbrücken | Germany

Phone +49 681 99 676-30
 Fax +49 681 99 676-3100

E-mail info@zenner.com
 Internet www.zenner.com